

DIRECTIONS FOR WIRING ARTWORK



All venues where we install artwork use a wire hanging system. Please read these directions thoroughly so that we can hang your work successfully. Thank you.



There are no clip frames allowed in these exhibits.


Please prepare your artwork in one of these ways:

For wood frames:

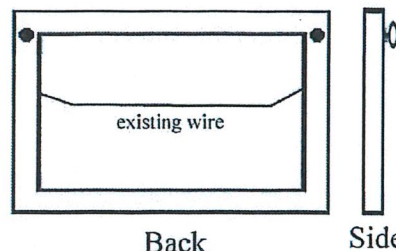



- 1) Eye hooks or hinged hooks on the back, top two corners of the frame 2-3" from the top of frame. (note - hinged hooks are best. Less possible damage and they lie flatter on the artwork.)

- 2) Jagged edge brackets on corners. Even small frames need **2 brackets** to keep artwork level.



For metal frames:

Unscrew and run the brackets that are built into the frames to within 2 - 3" from top of frame.

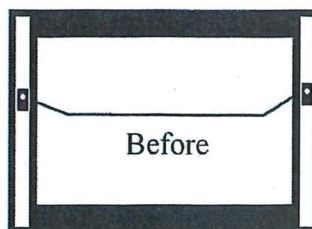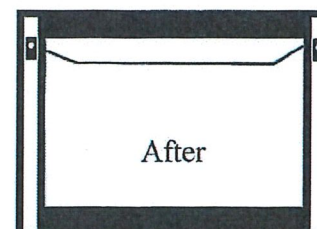

Please be sure keep any existing wires on the back of your pieces. We cannot hang from the existing wires and eyehooks if they are more than 2" from the top of the frame because the artwork will tip out causing a shadow on the artwork.